

FIG. 1

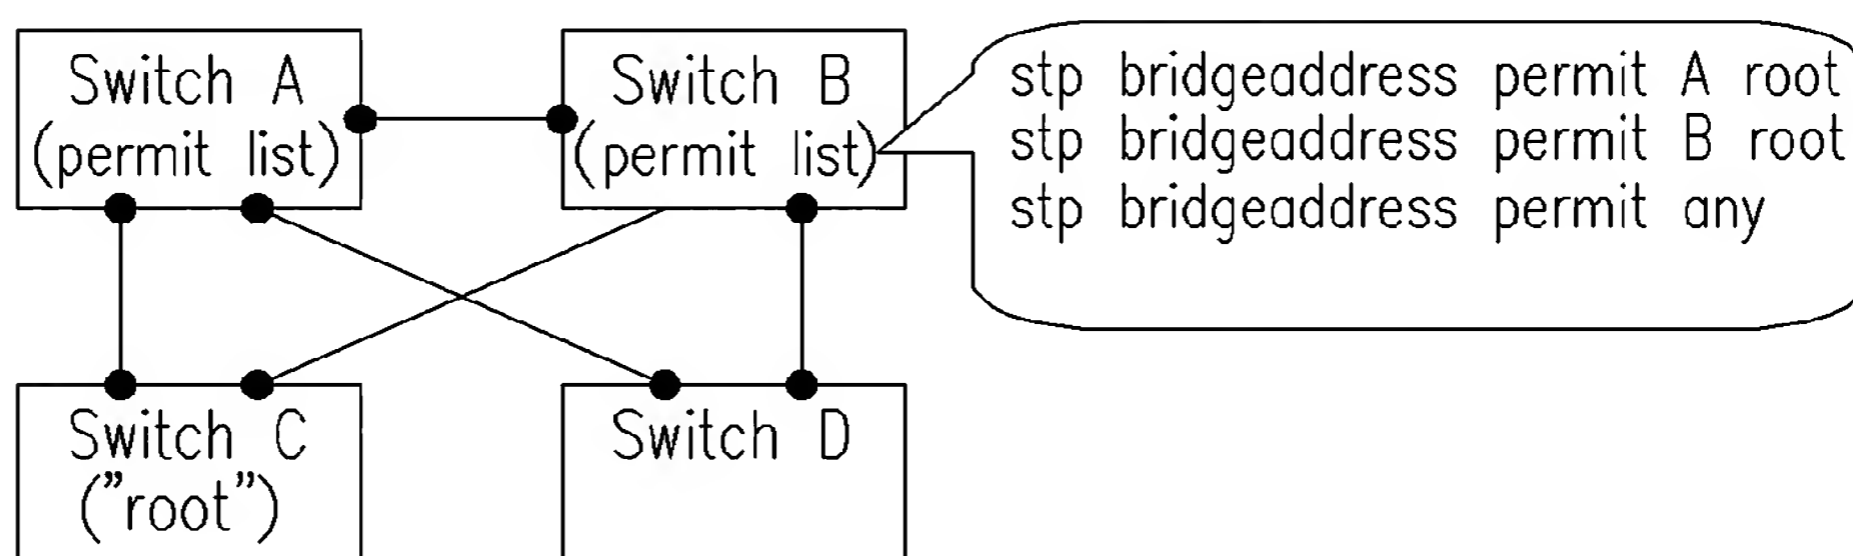


FIG. 2

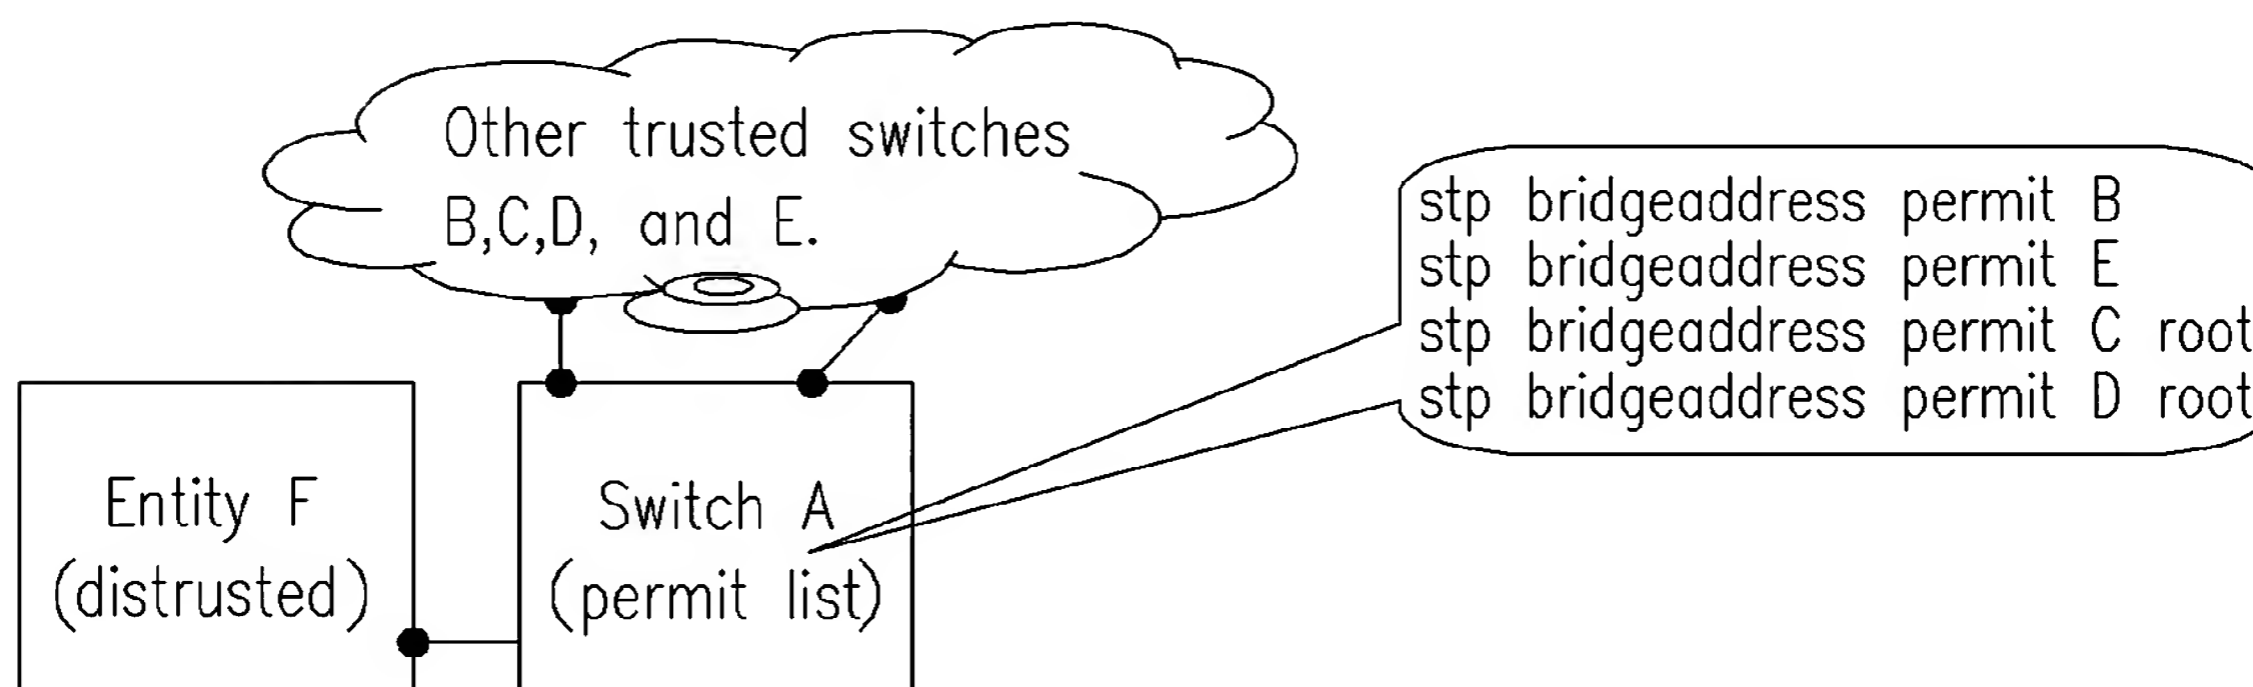


FIG. 3

Command	Description
stp bridgeaddress {enable disable}	Enables or disabled the bridge address permit list.
[no]stp bridgeaddress permit {<mac_address>} any [root]	Configures bridge address in the permit list. When the keyword root is specified, the root identifier is also checked against the specified bridge address.

FIG. 4

Command	Description
show bridgeaddress	Displays the trusted port configurations and the current permit list.
show bridgeaddress statistics	Displays the information regarding denials by the permit list.
clear bridgeaddress statistics	Resets the statistics.

FIG. 5